



SGT-600 Industrial Gas Turbine

Power Generation: (ISO) 24.77 MW(e)

The SGT-600 is the most efficient and environmentally friendly industrial gas turbine in its power range. The robustness of the industrial design ensures high reliability and availability in all environments and applications.



The Siemens SGT-600 is a heavy-duty industrial gas turbine designed and built to meet requirements for low life-cycle cost, i.e. low first cost, low fuel costs and low costs for operation and maintenance. Low fuel consumption, even at part loads, and short installation and commissioning times are major features of this turbine.

In cogeneration and combined-cycle applications, the high exhaust temperature of the gas turbine makes it one of the most efficient units on the market. The SGT-600 is even able to perform durably in aggressive industrial environments under really tough operating conditions, whether on-shore or offshore, in arctic or desert climate.

The outstanding reliability of the SGT-600 makes it ideal for interdependent multi-unit applications.

A single-lift power generation module for floating platforms such as FPSO (Floating Production, Storage and Offloading) and semi-submersibles is available for both the SGT-600 and the SGT-700.

The SGT-600 uses a Dry Low Emission (DLE) system maintaining low specific fuel consumption in all applications. The system is both stable and reliable, not requiring frequent recalibration, and coping easily with load changes, planned or otherwise.




Industrial Gas Turbines

Answers for energy.

SIEMENS

SGT-600 Industrial Gas Turbine

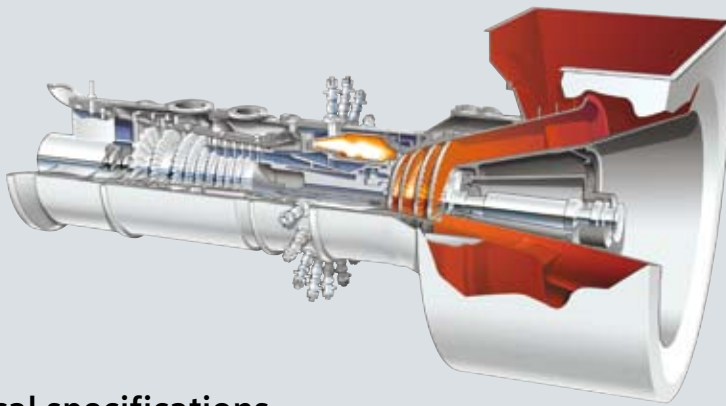

Technical specifications

Overview

- Power generation: 24.77 MW(e)
- Frequency: 50/60 Hz
- Electrical efficiency: 34.2 %
- Heat rate: 10,533 kJ/kWh (9,983 Btu/kWh)
- Turbine speed: 7,700 rpm
- Compressor pressure ratio: 14:1
- Exhaust gas flow: 80.4 kg/s (177.3 lb/s)
- Exhaust temperature: 543° C (1,009° F)
- NO_x emissions (with DLE corrected to 15 % O₂ dry)
 - Gas fuel: ≤25 ppmV
 - Liquid fuel: ≤42 ppmV (wet)

Axial Compressor

- 10-stage axial flow compressor
 - 2 stages variable guide vanes
- Electron-beam-welded rotor

Combustion

- 18 dual-fuel 2nd generation Dry Low Emissions (DLE) burners
- Welded annular sheet metal design

Emissions control

- DLE combustion system
- Water injection for NO_x-reduction during liquid fuel operation in DLE combustor

Compressor Turbine

- 2-stage axial-flow compressor turbine
 - Both stages are air-cooled

Power Turbine

- 2-stage free power turbine, uncooled
- Interlocking shrouds

Bearings

- Tilting pad radial and thrust
- Vibration- and temperature-monitoring

Fuel System

- Natural gas - Liquid fuel - Dual fuel
- Fuel-changeover capability at full and part load
- Gas-supply pressure requirement: 24.5 bar(a) ±0.5 bar (355±7 psi(a))

Gearbox

- 50 or 60 Hz

Generator

- Four-pole design
- Rated voltage: 10.5/11.0/13.8 kV
- 50 or 60 Hz
- Protection IP54
- PMG for excitation power supply
- Complies with IEC/EN 6034-1 standard

Lubrication

- Lubricating oil tank located in package base frame
- Two main lube oil circuits, low pressure and high pressure
- 3 x 50 % HP and 3 x 50 % LP AC-driven lube oil pumps with DC backup

Starting

- Electric VSD start-motor

Control System

- Siemens Simatic S7
- Distributed inputs/outputs



SGT-600 gas generator.

Gas turbine:

Key features

- Robust industrial design
- Low fuel consumption, high efficiency
- Excellent DLE experience
- Low emissions – DLE ≤25 ppm NO_x
- Low life-cycle cost
- Workshop tested
- Excellent operational availability and reliability
- Load rejection capability
- Highly reliable, clean and efficient power generation

Maintenance

- On-site maintenance or 24-hour exchange of gas generator
- No need for special workshop maintenance
- Modular build-up for easy maintenance on site
- Standardized concepts for maintenance planning
- Overhaul intervals of 40,000 hours
- Extended time between overhaul when running on part load
- Condition-based maintenance
- Horizontal split compressor casing
- Low deterioration and service cost



Two multi-unit deliveries of SGT-600 gas turbines power this cement factory near Riyadh, Saudi Arabia.



On Torrens Island, Australia, four SGT-600 gas turbines provide seasonal peaking support for the electrical grid.

Package:


Key features

- Compact layout
- Low life-cycle cost
- Short delivery time
- Same footprint as the SGT-700 gas turbine
- Fast and easy installation
- Major components delivered on a common base frame
- High availability/reliability for complete package

Customer Support:

Key features


- Global support network of Authorized Service Centers
- Emergency service – 24/7 specialist helpdesk
- Full field service
- Full diagnostic support, remote monitoring
- OEM modernizations and upgrades
- In-house or on-site training programs
- Range of maintenance and service contracts available

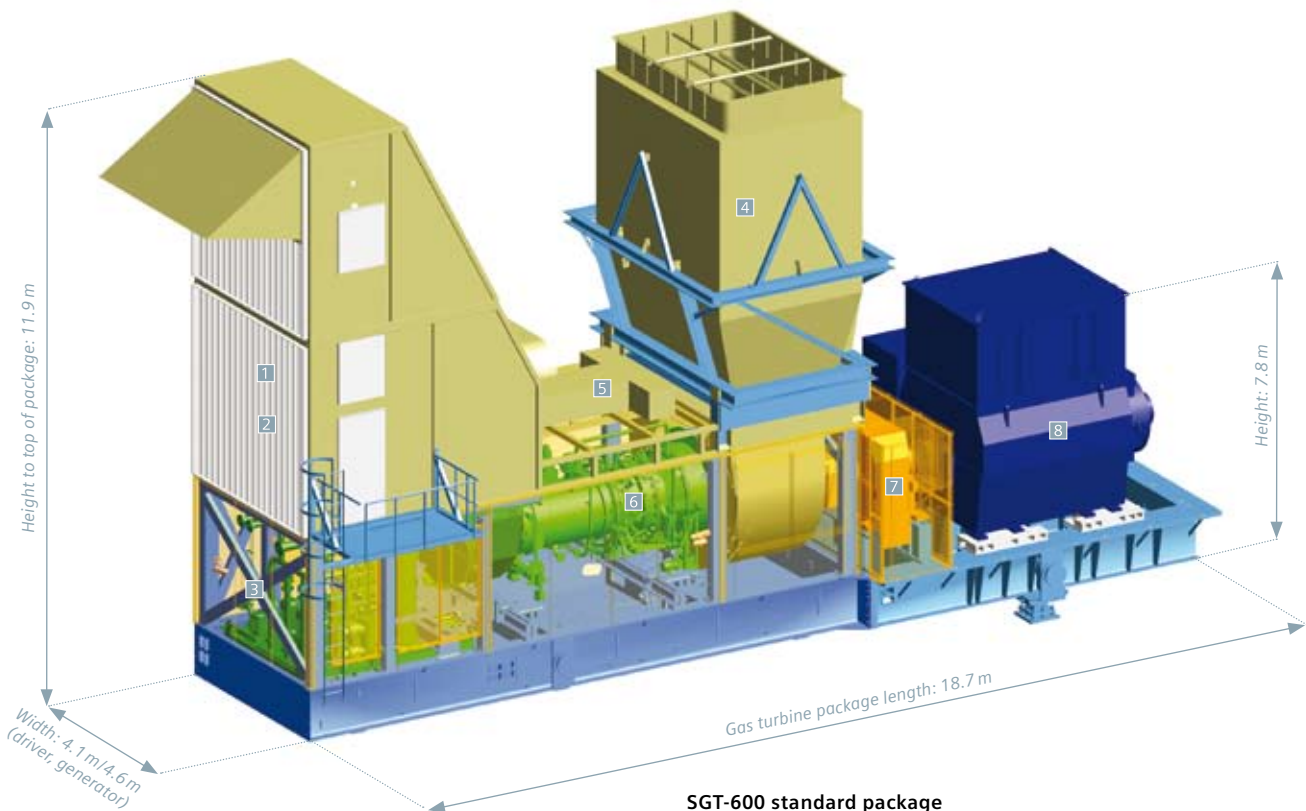

SGT-600 standard package

- | | | |
|------------------------|------------------------|------------------------|
| 1 Combustion air inlet | 4 Combustion exhaust | 7 Speed reduction gear |
| 2 Enclosure air inlet | 5 Enclosure air outlet | 8 AC generator |
| 3 Lube oil system | 6 Core engine | |

SGT-600 Performance

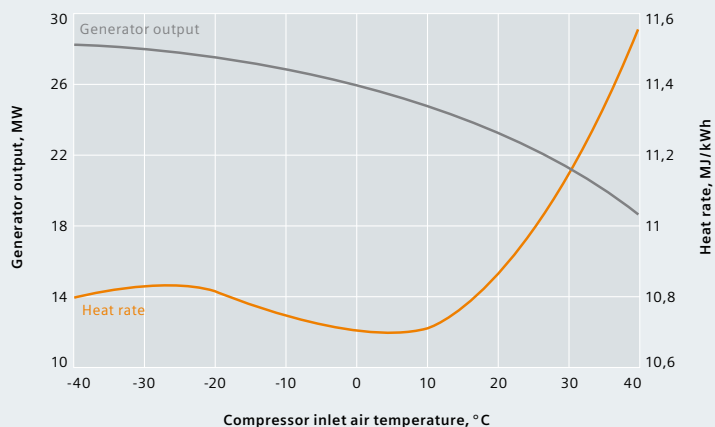


Nominal generator output and heat rate

Conditions/assumptions:

Fuel: Natural Gas LHV, 46,798 kJ/kg (20,118 Btu/lb)
 Altitude: Sea level
 Ambient pressure: 1,013 bar(a) (14.7 psi(a))
 Relative humidity: 60 %
 Inlet pressure loss: 5 mbar (2" H₂O)
 Outlet pressure loss: 5 mbar (2" H₂O)
 Fuel temperature: 5° C (41° F)

Diagram conversion factors:

To convert	To	Multiply by
°C	°F	(°C x 9/5) + 32
MJ/kWh	Btu/kWh	949

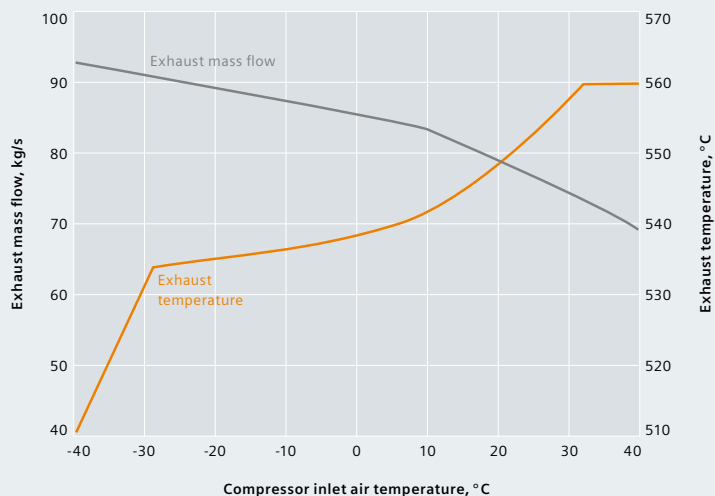


Nominal exhaust mass flow and temperature

Conditions/assumptions:

Fuel: Natural Gas LHV, 46,798 kJ/kg (20,118 Btu/lb)
 Altitude: Sea level
 Ambient pressure: 1,013 bar(a) (14.7 psi(a))
 Relative humidity: 60 %
 Inlet pressure loss: 5 mbar (2" H₂O)
 Outlet pressure loss: 5 mbar (2" H₂O)
 Fuel temperature: 5° C (41° F)

Diagram conversion factors:

To convert	To	Multiply by
°C	°F	(°C x 9/5) + 32

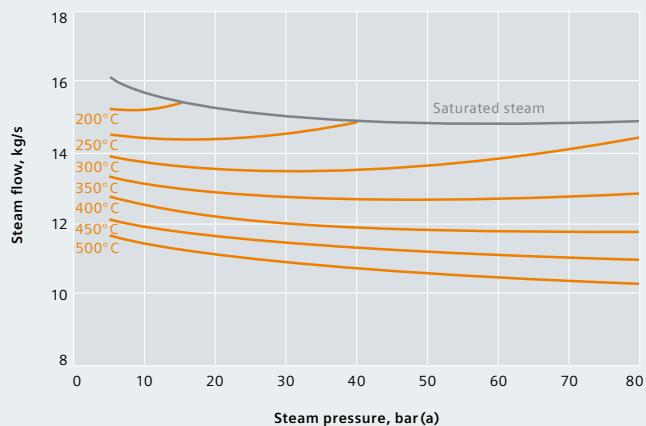

Unfired heat-recovery steam generation

Conditions/assumptions:

Fuel: Natural Gas LHV, 46,798 kJ/kg (20,118 Btu/lb)
 Altitude: Sea level
 Ambient pressure: 1,013 bar(a) (14.7 psi(a))
 Ambient temperature: 15° C (59° F)
 Relative humidity: 60 %
 Boiler pinch point: 8° C (14° F)
 Boiler approach point: 5° C (9° F)
 Inlet pressure loss: 5 mbar (2" H₂O)
 Outlet pressure loss: 25 mbar (10" H₂O)

Diagram conversion factors:

To convert	To	Multiply by
°C	°F	(°C x 9/5) + 32
kg/s	lb/s	2.2046
bar	psi	14.5

Published by and copyright © 2010:

Siemens AG
 Energy Sector
 Freylebenstrasse 1
 91058 Erlangen, Germany

Siemens AG
 Energy Sector
 Oil & Gas Division
 Wolfgang-Reuter-Platz
 47053 Duisburg, Germany

Siemens Energy, Inc.

10730 Telge Road
 Houston, Texas 77095, USA

Siemens Industrial Turbomachinery AB
 SE-612 83 Finspong, Sweden

For more information, please contact our
 Customer Support Center.

Tel: +49 180 524 70 00

Fax: +49 180 524 24 71

(Charges depending on provider)

E-mail: support.energy@siemens.com

Oil & Gas Division

Order No. E50001-W430-A109-X-4A00

Printed in Germany

Dispo 34806, c4bs No. 7447, PWS 03103.

All rights reserved. Trademarks mentioned
 in this document are the property of Siemens AG,
 its affiliates, or their respective owners.

Subject to change without prior notice.

The information in this document contains
 general descriptions of the technical options
 available, which may not apply in all cases.

The required technical options should
 therefore be specified in the contract.